


HEXA-4xDA

16-Channel 4x Distribution Amplifier

This 3U rackmounted unit includes (16) separate 4-output DAs. Each input is equalized and relocked for transmission on the outputs. The unit is powered by AC power, so only a single cable is needed at the rear of the rack. The enclosure features rugged steel chassis, with full-size BNCs tightened directly to the steel face.

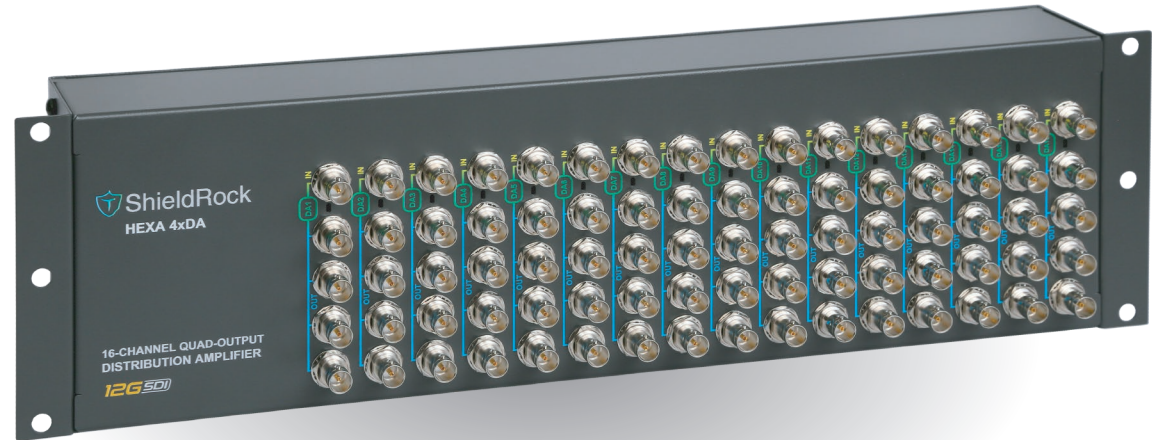

Video Interface

- 12G-SDI, 6G-SDI, 3G-SDI, HD-SDI, SD-SDI, DVB-ASI (auto switching)
- SMPTE 292M, 259M, 296M, 297M, 372M, 424M, 425M, 2081, 2082
- Supports AES10 multi-channel (MADI) audio

Video Format

- 4K/UHD 2160p 23.98/24/25/29.97/30/48/50/59.94/60
- 2K/HD 1080p 23.98/24/25/29.97/30/48/50/59.94/60
- 1080i 50/59.94/60
- 1080PsF 23.98/24/25/29.97/30
- 720p 23.98/24/25/29.97/30/48/50/59.94/60
- SD 525i/29.97 NTSC, 625i/25 PAL



Electrical

- Input 110-240 VDC
- Power 24W max

Mechanical

- Dimensions 5.65 x 3.10 x 0.93in (143.5 x 78.7 x 23.6mm)
- Weight 180g

Connections

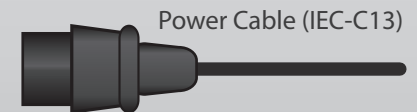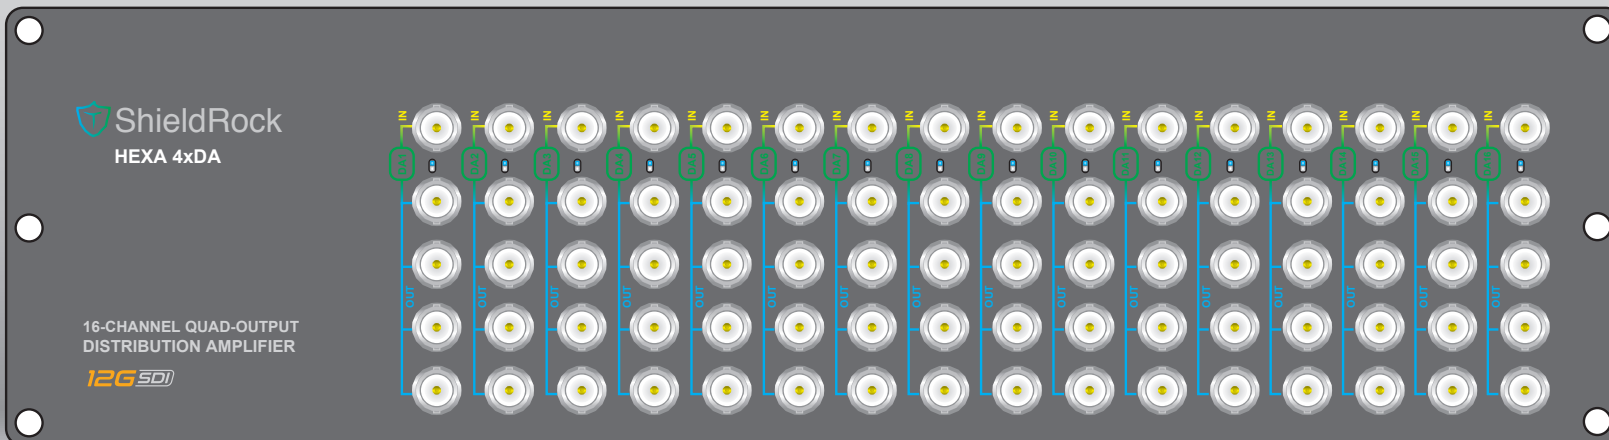

Up to (80) 12G-SDI Cables
(eg. SRCAB-12G-0000-3FT)

